



**Read complete instructions
before installation!
Improper installation may
void warranty**

Description: Head Light
Application: 1994-2001 Dodge Ram




Tools needed. 10mm socket, flat head screwdriver, wire splicer, electrical tape.



Step 1: Use the flat head screwdriver to remove the pin holding in the place bumper



Step 2: Remove the plastic bumper guard with the flat head screwdriver for the clips inside the metal bumper.

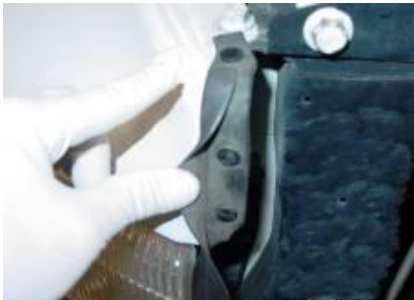

Step 3: Remove the three push pins holding the dust cover from the frame.



Step 4: Remove the top 10mm screw holding in the headlight.



Step 5: Remove the second 10mm screw under the corner light.



Step 6: Remove the third screw from the bottom headlight.



Step 7: Twist off the corner light from the headlight.



Step 8: Twist off the headlight bulb from the housing.



Step 9: Remove the headlight from the car.



Step 10: Plug the supplied 2 to 1 wire harness into the new head light.



Connect the high beam and low beam plugs, check connectors for proper install.



Step 11: Two black wires are non-polarity either wire is power or ground. Black and blue wires, blue is power black is ground.



Step 12: Splice (2) power wires to brown wire on parking light connector. Splice (2) black wires to black wire on parking light connector.



Step 13: Plug the headlight wire harness into the original headlight harness.



Step 14: Plug in the corner light.



Step 15: Bolt on the headlight and check all functions before driving.

