




Tools required:

Small flat head screwdriver, T15 Torx bit and driver
3/8 drive ratchet, 3/8 extension, 7mm & 10mm sockets

Step 1: Open hood and disconnect
negative lead cable.

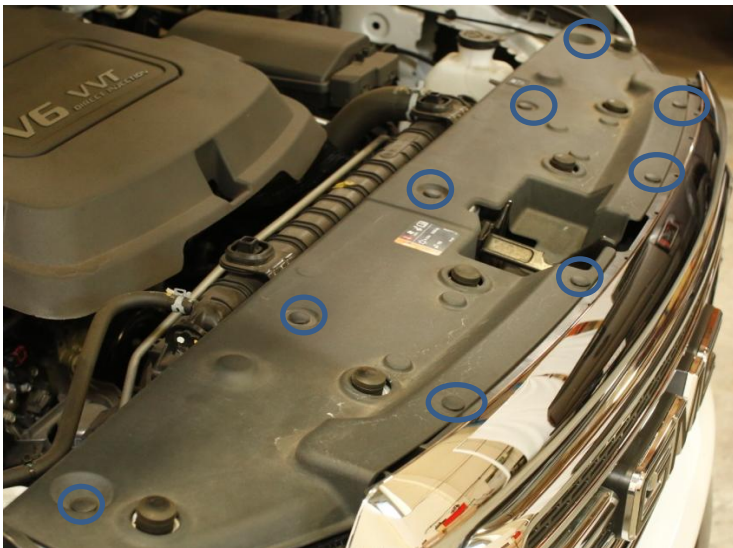


Step 2: Remove fan shroud by removing 9
plastic push tabs.



Close picture of tab removed.




Step 3: With the fan shroud loose, remove fan shroud and place in a safe area.

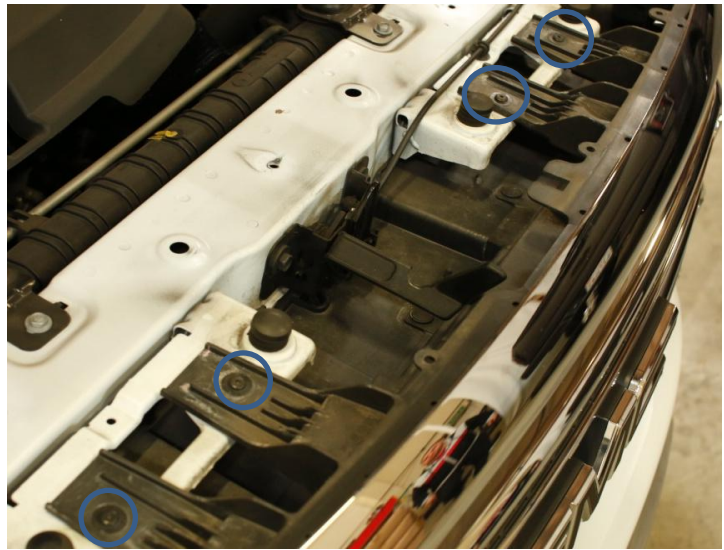

Step 4: Remove four screws with T15 Torx bit to loosen grill.



Step 5: Remove six T15 Torx bit screws to peel back tire shroud, within bumper you will locate three 7mm bolts that must be removed.

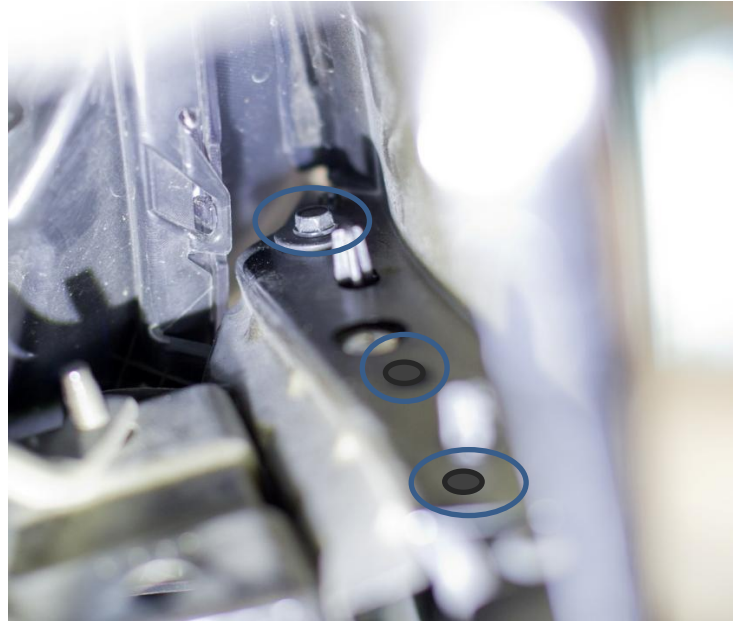

Step 5B: Picture of the inside of the bumper and removing of the three 7mm bolts, repeat step 5 on passenger side.



Step 6: Gently pull down on the side of the bumper to detach from fender, repeat process on passenger side.




Step 7: Detach two clips from under grill with panel popper or small flat head screwdriver, repeat process on passenger side.



Step 8: Remove two 10mm bolts located within the air dam, near the front license plate.



Step 9: With the front bumper being fully detached from grill, you can gently detach the grill from the truck. **Tip:** *Once you detach the grill from each headlight, lean the grill forward and pull out.*

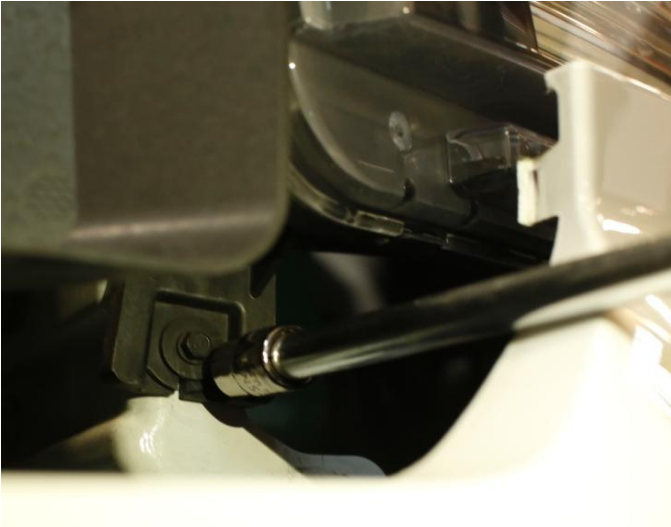


Step 10: Remove OEM headlight by removing four 10mm bolts, one located near radiator.



Step 11: Remove second 10mm bolt located between fender and bumper.



Step 12: Remove two 10mm bolts from on top of headlight.

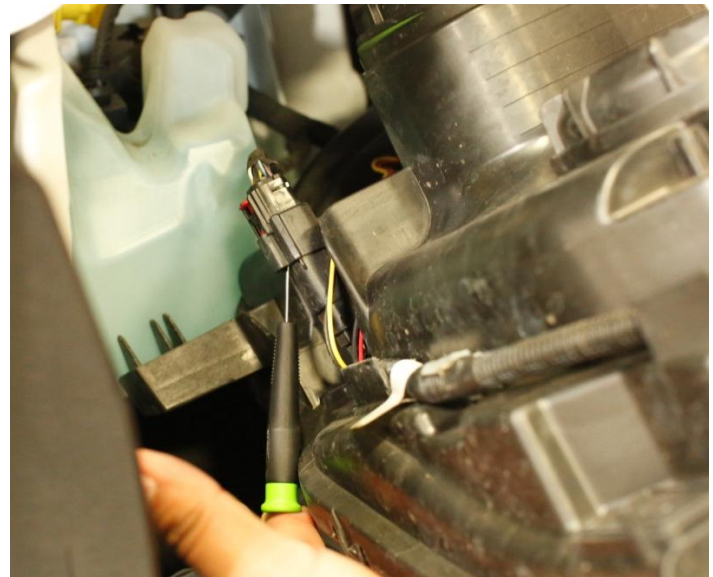

Step 13: Tilt headlight forward to disconnect harness. You might require a small flat head screwdriver to remove connector, then remove headlight.



Step 14: Install the Anzo headlight and connect the one OEM harness to headlight and repeat step 12 thru 10 in reverse to secure the Anzo headlight.



Step 15: Repeat steps 10 thru 14 on passenger headlight.

Step 16: Reverse steps 9 thru 1 to reinstall front bumper and grill.

Tip: when reinstalling the grill, have someone help you guide the grill in place, as the bottom fastener can scratch the new headlights.



Step 17: Test all headlight functions before driving on public road.

AnzoUSA™ products are covered, by a limited one (1) year warranty, to be free of manufacturer's defects. However, certain AnzoUSA™ product categories have warranty policies which differ from this standard, please contact your representative for detailed category information. Damage due to improper installation or road hazards is not covered. Seller and manufacturers' only obligations shall be to replace the product proven to be defective. Neither seller nor manufacturer shall be liable for any injury, loss or damage, direct or consequential, arising out of the use of or the inability to use the product. Before using, user shall determine the suitability of the product for its intended use, and user assumes all risk and liability whatsoever in connection therewith.